


FIRE BRICK N-4

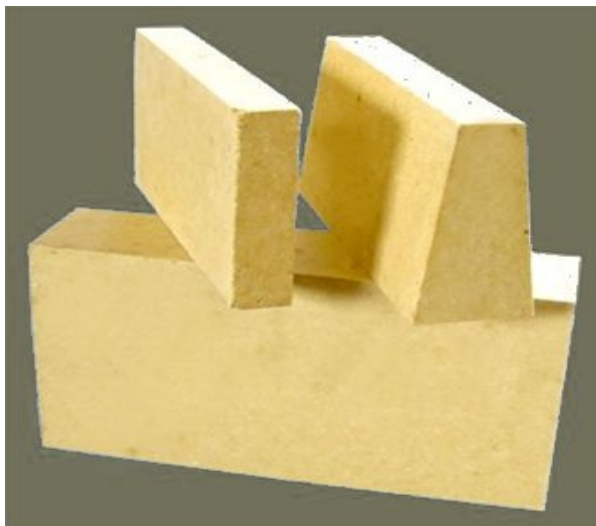

Classification:		General Purpose High Duty Firebrick
Typical Chemical Analysis:	Al ₂ O ₃	35%
	SiO ₂	60%
	Fe ₂ O ₃	2.5%
Refractoriness:		1700°C
Bulk Density:		2.1g/cm ³ min.
Apparent Porosity:		≤ 24%
Cold Crushing Strength:		20MPa min.
Refractoriness Under Load: 0.2MPa °C ≥		1300 min.
Linear Change After Reheating:		1350°C x 2h +2 ~ -0.5%
Standard Sizes		230 x 115 x 75, 40, 25mm thick

Application Range:

Furnaces, Boilers, Domestic Coal & Wood Burners, Domestic Fireplaces & Stoves, BBQ's, Pizza Ovens etc.

Note:

The above data is subject to reasonable variation and is intended as a guide only.

A full range of fire clay and high alumina fire bricks in various shapes and sizes is available on request.